




Hott T725-8G Camera Replacement

This guide will walk you through replacing the camera on the Hott T725-8G. You will need this [<https://www.ifixit.com/Guide/Hott+T725-8G+Back+Panel+Replacement/74840>] Prerequisite Guide] before you begin.

Written By: Emma Carroll

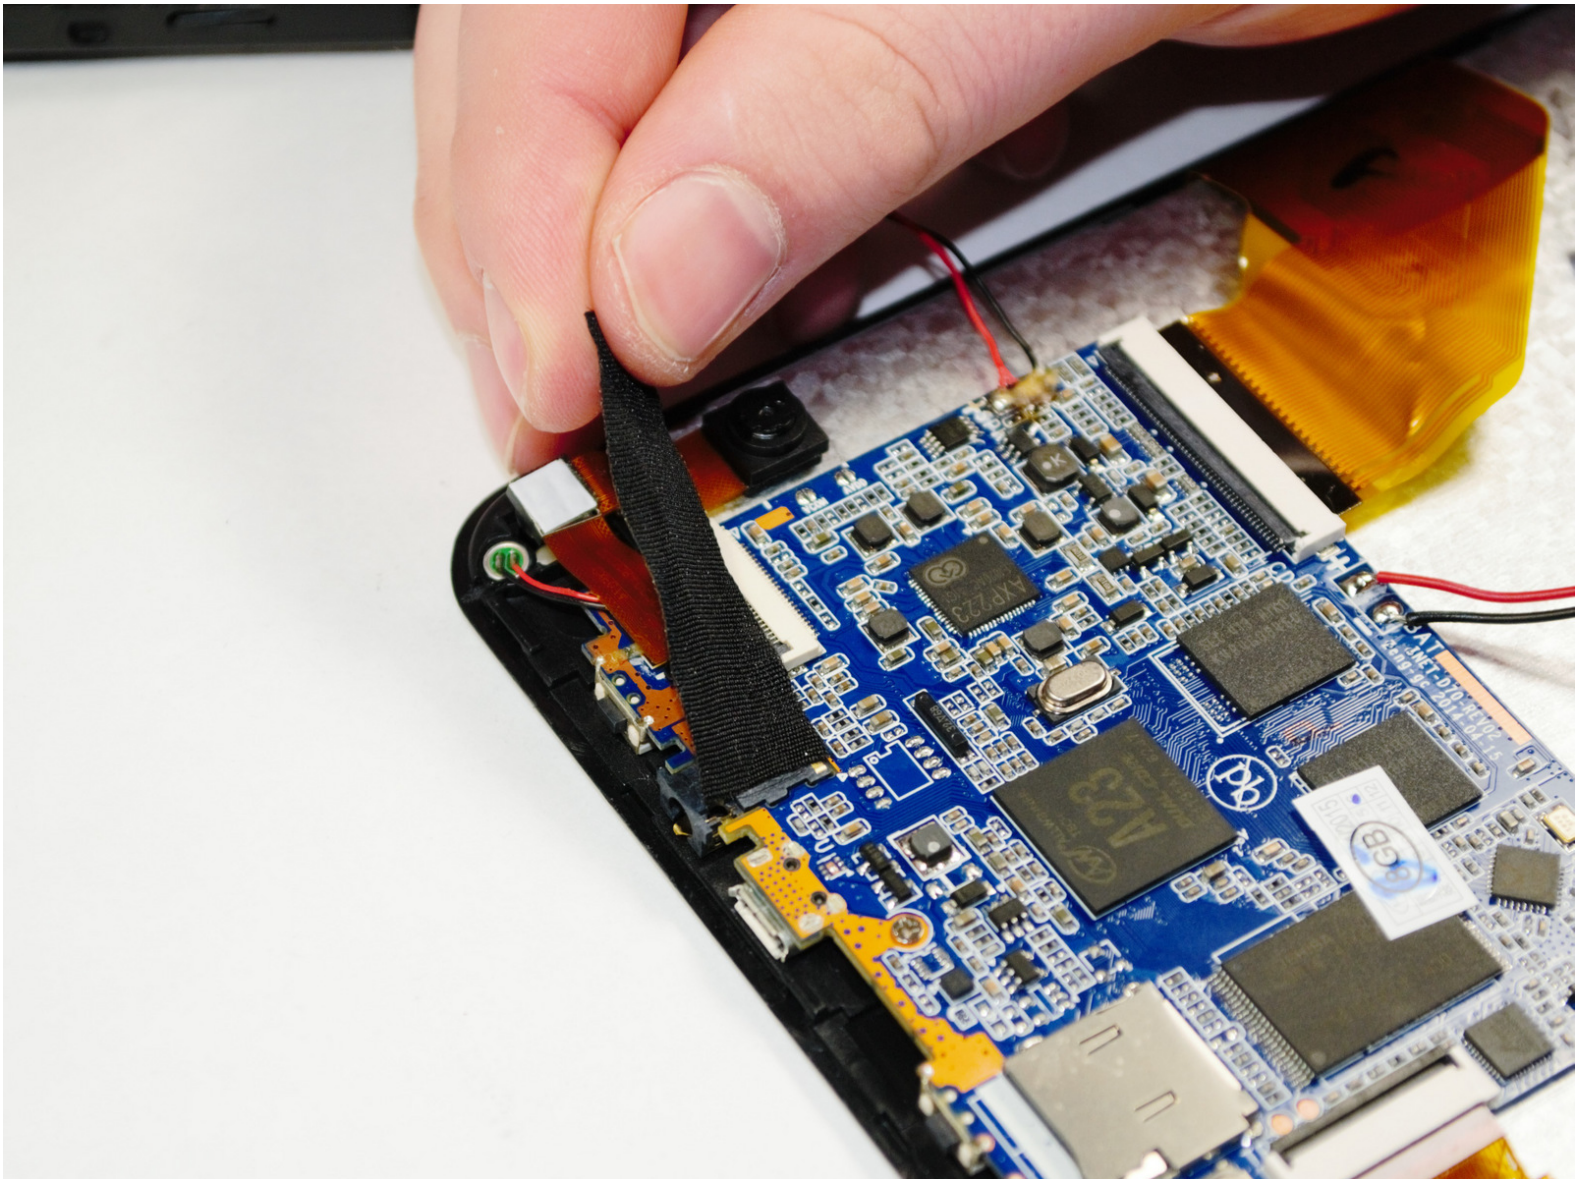

INTRODUCTION

Follow this guide to replace the camera in the Hott T725-8G.



TOOLS:


- [iFixit Opening Tools](#) (1)
- [Precision Tweezers Set](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Spudger](#) (1)



PARTS:


- [Replacement Android Camera](#) (1)
-

Step 1 — Camera

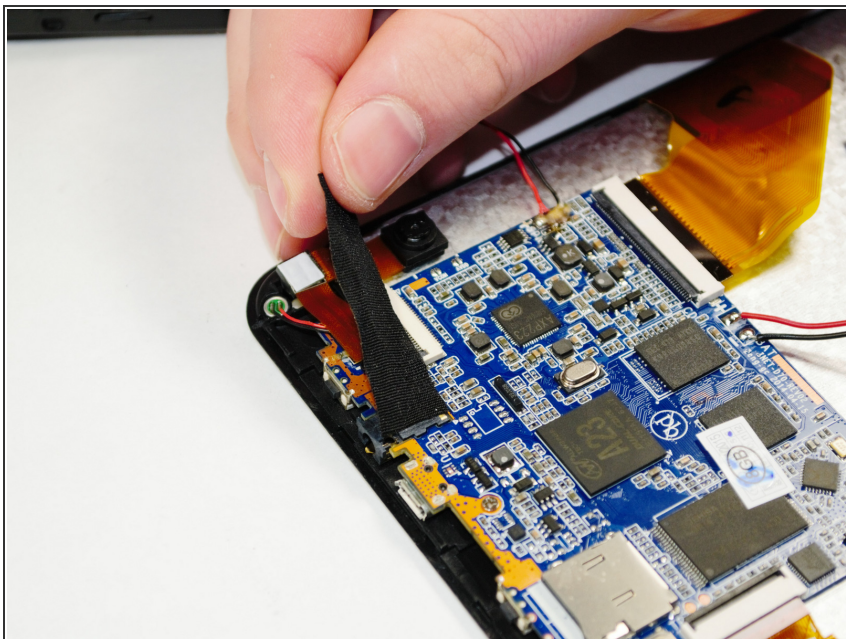


- Carefully remove the black electrical tape connecting the motherboard to the ribbon wire.

Step 2

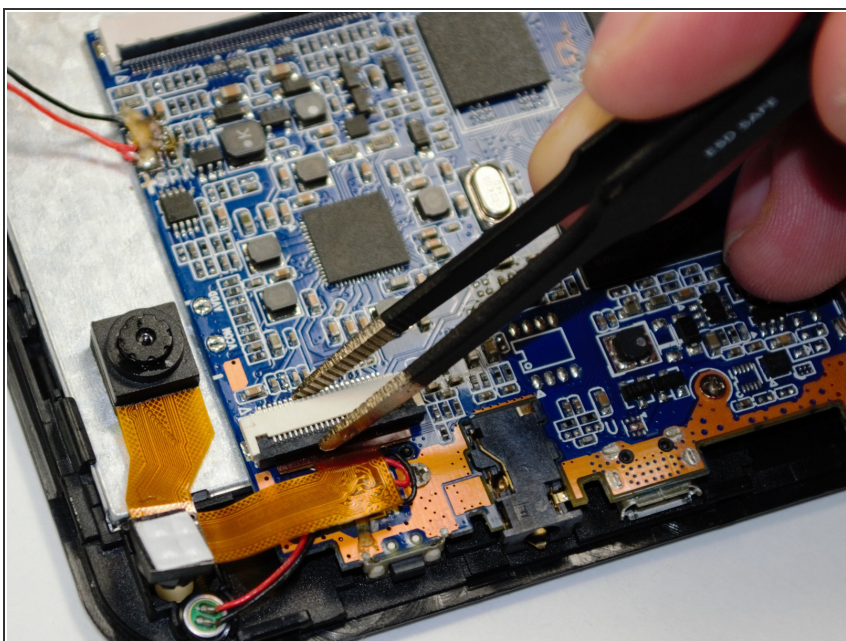


- Use a pair of Precision Tweezers to squeeze the clip of the ribbon wire to release it.

Step 3

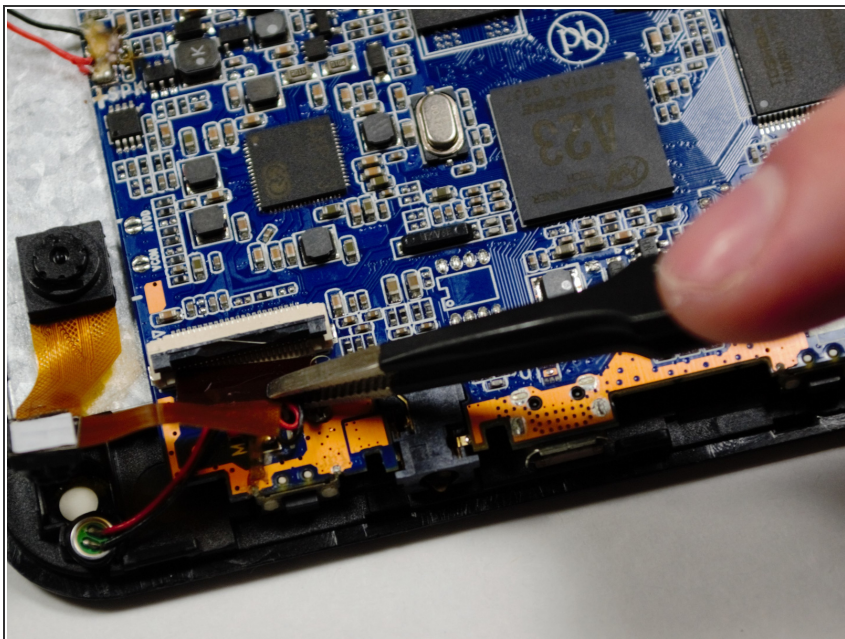

- Using a pair of the Precision Tweezers, remove the ribbon wire from the clip.

Step 4

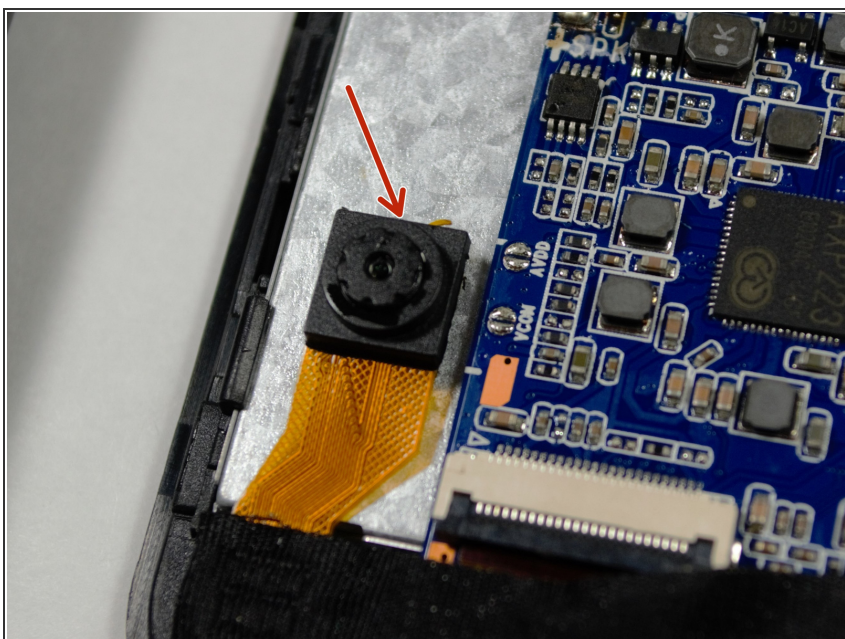

- Gently dislodge the camera using the Metal Spudger. The camera is now ready to be replaced.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 02:13:23 PM.